

Version: 20/09/2021

	contains	m ²	ft ²	weight
1 pack Live planks	10 planks	2.705 m ²	29.116 ft ²	13,1 kg
1 pallet Live planks	42 packs	113.61 m ²	122.89 ft ²	577 kg
1 pack Live tiles	10 tiles	1.87 m ²	20.128 ft ²	8,9 kg
1 pallet Live tiles	56 packs	104.72 m ²	1127.20 ft ²	524 kg





product specifications

			planks	tiles
Dimensions	EN ISO	24346	1326 x 204 mm	612 x 306 mm
Total thickness	EN ISO	24346	3.8 mm	
Wear layer	EN ISO	24340	0,30 mm	
Total weight	EN ISO	23997	4,7 kg/m ²	
Surface treatment			PUR	
Usage classification	EN ISO	10582	23/31	
Residential warranty			15 years	
Commercial warranty	EN ISO	10874	3 years	

test results

Underfloor heating	EN ISO	12524	suitable max 27°C (80°F)/ electrical floorheating systems max 60 W/m ²	
Fire resistance	EN ISO	13501-1	Bfl-s1	
Chemical resistance	EN ISO	26987	OK	
Thermal resistance	EN ISO	8302	0.0192 m ² K/W	
Residual indentation	EN ISO	24343-1	< 0,10 mm	
Slip resistance	DIN	51130	R10	
	EN ISO	13893	Class DS	
Sound reduction: impact sound	EN ISO	717-2	8 dB	
Light fastness	EN ISO	105-B02	> 6	
Dimensional stability	EN ISO	23999	≤ 0,10 %	
Antistatic	EN ISO	1815	yes	
Formaldehyde	EN ISO	717-1	E1	
VOC emission			Indoor air comfort GOLD	



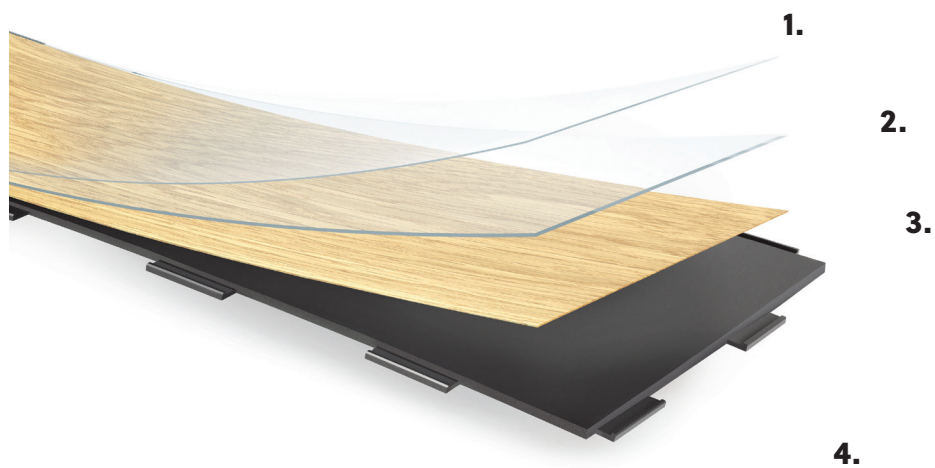

1. Protective PU lacquer
2. Wear layer 0,30 mm
3. Decor layer
4. Rigid Composite Board (RCB)
with DreamClick locking elements